


Please read through this owners manual carefully before using your new tool.
Use your tool properly and only for its intended use.



Small Face Electronic Indicator

I. Features

1. ON/OFF
2. Floating ZERO
3. Direct mm/in conversion
4. Battery cover
5. 3/8" stem diameter
6. 4 - 48 carbide contact point

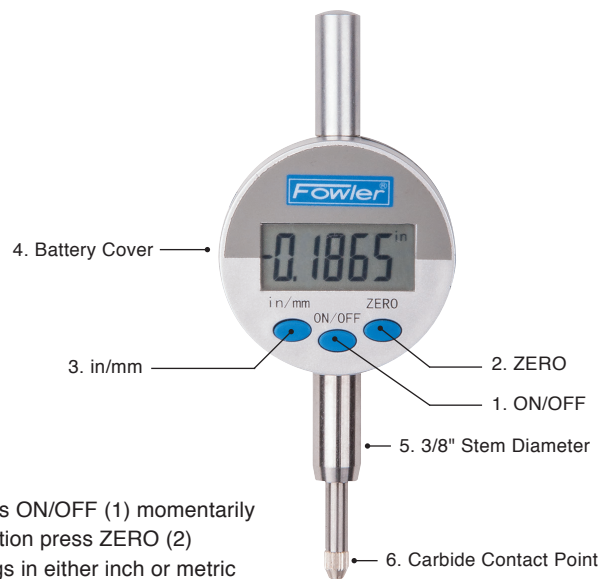

II. Operation

1. To turn the indicator on or off press ON/OFF (1) momentarily
2. To ZERO the indicator at any location press ZERO (2)
3. Press mm/in (4) to display readings in either inch or metric

III. Technical Data

Measuring Range	0 - 0.50" / 0 - 13mm
Resolution	0.0005" / 0.01mm
Accuracy	± 0.001" / 0.02mm
Repeatability	0.0005" / 0.01mm
Display	LCD (9mm high)
Maximum Measuring Speed	1.5m per second
Battery	3V, type CR2032 Lithium
Battery Life	Approx. 1 year

IV. Maintenance

- Avoid contact with liquids and excessive humidity
- If the instrument requires cleaning, use only isopropyl alcohol and soft cloth
- Battery is low when the display flashes. To replace the battery, use a small screwdriver to open the side battery compartment (6). Uses 1 CR2032 battery.


Please read through this owners manual carefully before using your new tool.
Use your tool properly and only for its intended use.



Small Face Electronic Indicator

I. Features

1. ON/OFF
2. Floating ZERO
3. Direct mm/in conversion
4. Battery cover
5. 3/8" stem diameter
6. 4 - 48 carbide contact point

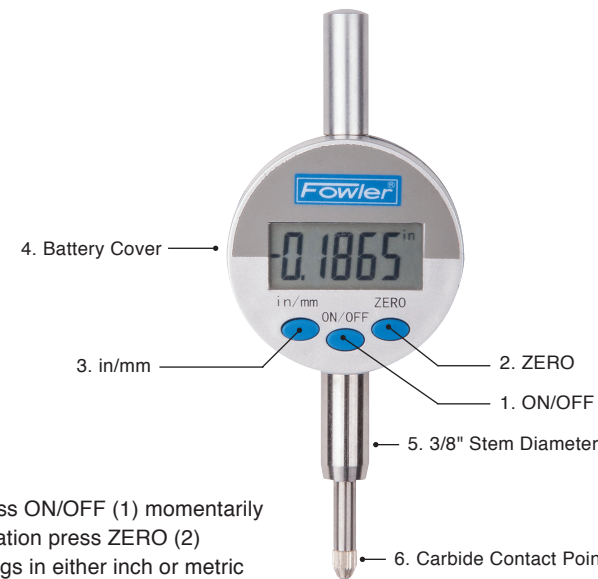

II. Operation

1. To turn the indicator on or off press ON/OFF (1) momentarily
2. To ZERO the indicator at any location press ZERO (2)
3. Press mm/in (4) to display readings in either inch or metric

III. Technical Data

Measuring Range	0 - 0.50" / 0 - 13mm
Resolution	0.0005" / 0.01mm
Accuracy	± 0.001" / 0.02mm
Repeatability	0.0005" / 0.01mm
Display	LCD (9mm high)
Maximum Measuring Speed	1.5m per second
Battery	3V, type CR2032 Lithium
Battery Life	Approx. 1 year

IV. Maintenance

- Avoid contact with liquids and excessive humidity
- If the instrument requires cleaning, use only isopropyl alcohol and soft cloth
- Battery is low when the display flashes. To replace the battery, use a small screwdriver to open the side battery compartment (6). Uses 1 CR2032 battery.