

www.fowlerprecision.com



	-	For	Certificate Of Calibration		
	-		0404000 (040400 (04040) (04040) (04040) (04040) (04040 (04040)))		sylva
	" <u>U</u> SUI		Ultra C	al VI Fowler M	
-	MODE		The second		
		4 IP67		54-100-167-0	IOT
		i duministi i duministi i directori			
	E State	Aphile services or pro-	NOM NO GROW GROW NOM NO GROW GROW NO.64 NO GROW GROW		READY
		Plants of the second seco			
P67 rated		Kennet Aussel	A by		
			OAVA	MALA DO DA MUTT	
0	or without Blu	etooth		WARRANI	Y
vailable with	or without Blu	etooth		and the second second second	
vailable with eavy duty fra xtra large dis	ime play				Learn more at
vailable with leavy duty fra xtra large dis IOW available	ame play e with ISO Cel	rt		IP67	Learn more at You Tube
vailable with eavy duty fra xtra large dis OW available	ime play	rt	Suris	IP67	Learn more at
vailable with eavy duty fra xtra large dis OW available 2"/300mm is	ame play e with ISO Cer supplied witho	rt but depth rod	1.0	IP67	Learn more at You Tube
vailable with eavy duty fra xtra large dis OW available	ame play e with ISO Cer supplied witho Description	rt	Resolution	IP67	Learn more at You Tube FowlerVid
vailable with eavy duty fra xtra large dis OW available 2"/300mm is rder No. /ithout Data O	ame play e with ISO Cer supplied witho Description	rt but depth rod	1.0	Zualityi	Learn more at You Tube FowlerVid
vailable with eavy duty fra xtra large dis OW available "/300mm is rder No. //ithout Data O 4-100-177-0	time splay e with ISO Cen supplied witho Description utput 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm	Resolution 0.0005"/0.01mm	2uslityl	Learn more at YOU Tube FowlerVid Sale Price \$108.90
vailable with eavy duty fra xtra large dis OW available ?"/300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0	with ISO Cer supplied with Description utput 6"/150mm 8"/200mm	rt put depth rod <u>Accuracy</u> 0.0008"/20µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10
vailable with eavy duty fra xtra large dis OW available 2"/300mm is rder No. //thout Data O 4-100-177-0 4-100-178-0 4-100-178-0	time splay e with ISO Cen supplied witho Description utput 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm	Resolution 0.0005"/0.01mm	Zualityi	Learn more at YOU Tube FowlerVid Sale Price \$108.90
vailable with eavy duty fra tra large dis OW available "/300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-179-0 luetooth	ume splay e with ISO Cell supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00
vailable with eavy duty fra xtra large dis OW available "/'300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-179-0 luetooth 4-100-167-0	time splay e with ISO Cet supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20
vailable with eavy duty fra xtra large dis OW available "/300mm is rder No. //thout Data O 4-100-177-0 4-100-178-0 4-100-178-0 Juetooth 4-100-167-0 4-100-167-C	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm th ISO/A2LA Certifi/	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20
vailable with eavy duty fra xtra large dis OW available 2"/300mm is rder No. //thout Data O 4-100-177-0 4-100-178-0 4-100-178-0 Juetooth 4-100-167-0 4-100-167-0 4-100-168-0	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm <i>wi</i> 8"/200mm	h cut depth rod Accuracy 0.0008"/20μm 0.0012"/30μm 0.0008"/20μm 0.0008"/20μm th ISO/A2LA Certifit 0.0012"/30μm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20 581.40
vailable with leavy duty fra xtra large dis IOW available	ame play e with ISO Cel	rt	Suris	IP67	Learn m You
ble with r duty fra large dis available 00mm is No. ut Data O -177-0 -178-0	with ISO Cer supplied with Description utput 6"/150mm 8"/200mm	rt put depth rod <u>Accuracy</u> 0.0008"/20µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10
vailable with eavy duty fra xtra large dis OW available 2"/300mm is rder No. //thout Data O 4-100-177-0 4-100-178-0 4-100-178-0	with ISO Cer supplied with Description utput 6"/150mm 8"/200mm	rt put depth rod <u>Accuracy</u> 0.0008"/20µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10
vailable with eavy duty fra tra large dis OW available "/300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-179-0 luetooth	ume splay e with ISO Cell supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00
vailable with eavy duty fra tra large dis OW available "/300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-179-0 luetooth	ume splay e with ISO Cel supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00
vailable with eavy duty fra xtra large dis OW available "/'300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-179-0 luetooth 4-100-167-0	time splay e with ISO Cet supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20
vailable with eavy duty fra tra large dis OW available "//300mm is rder No. (ithout Data O I-100-177-0 I-100-178-0 I-100-178-0 Iuetooth I-100-167-0 I-100-167-C	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm th ISO/A2LA Certifi/	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20
vailable with eavy duty fra tra large dis OW available "//300mm is rder No. (ithout Data O I-100-177-0 I-100-178-0 I-100-178-0 Iuetooth I-100-167-0 I-100-167-C	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm th ISO/A2LA Certifi/	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20
vailable with eavy duty fra ttra large dis OW available 2"/300mm is rder No. "Ithout Data O 1-100-177-0 1-100-178-0 1-100-167-0 1-100-167-0 1-100-167-0 1-100-168-0	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm	h cut depth rod Accuracy 0.0008"/20μm 0.0012"/30μm 0.0008"/20μm 0.0008"/20μm th ISO/A2LA Certifit 0.0012"/30μm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20
vailable with eavy duty fra xtra large dis OW available 2"/300mm is rder No. //ithout Data O 4-100-177-0 4-100-178-0 4-100-178-0 Juetooth 4-100-167-0 4-100-167-0 4-100-168-0	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm <i>wi</i> 8"/200mm	h cut depth rod Accuracy 0.0008"/20μm 0.0012"/30μm 0.0008"/20μm 0.0008"/20μm th ISO/A2LA Certifit 0.0012"/30μm	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation 0.0005"/0.01mm	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20 581.40
vailable with eavy duty fra xtra large dis OW available "/300mm is "rder No. /ithout Data O 4-100-177-0 4-100-178-0 4-100-178-0 Juetooth 4-100-167-0 4-100-167-C	ime splay e with ISO Cer supplied witho Description utput 6"/150mm 8"/200mm 12"/300mm 6"/150mm 6"/150mm	rt put depth rod Accuracy 0.0008"/20µm 0.0012"/30µm 0.0012"/30µm 0.0008"/20µm th ISO/A2LA Certifi/	Resolution 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm 0.0005"/0.01mm cation	Zualityi	Learn more at You Tube FowlerVid Sale Price \$108.90 220.10 298.00 \$313.20 342.20

Ultra-Cal VI Proximity Electronic Calipers

54-100-444-1

P67

Ultra Cal VI Fowler

LIFETIM WARRANT

Swiss Quality!

- IP67 rated
- · Ultra-Cal VI technology with proximity cable data output
- · Heavy duty frame
- Extra large display
- · 12"/300mm is supplied without depth rod

Order No.	Description	Accuracy	Resolution		Sale Price	
54-100-444-1	6"/150mm	0.0008"/20µm	0.0005"/0.01mm	Compare to Mitutoyo 500-171-30 @ \$165.87	\$146.70	
54-100-448-1 54-100-412-1	8"/200mm 12"/300mm	0.0012"/30µm 0.0012"/30µm	0.0005"/0.01mm 0.0005"/0.01mm		264.90 354.70	5
Connectivity Ca 54-115-526-0 54-155-527-0	Proximity cable	e with USB connection with serial connection			\$135.00 135.00	

Find us on social media!

-

lvac

Connectivity Cables 54-115-526-0 Pr

54-115-527-0



MICTON 0.00005" Electronic Caliper

\$143.00


143.00

\$135.00

135.00

Proximity cable with USB connection

Proximity cable with serial connection

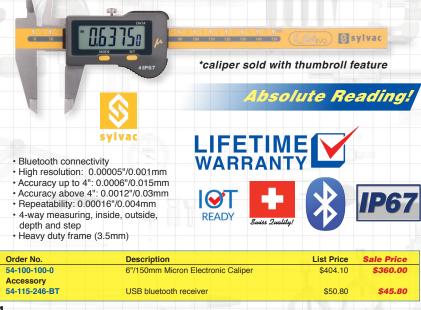

Prices & Specifications are subject to change without notice.

4



Prices & Specifications are subject to change without notice.

5

	000				
254		Fo	wer EURO-CAL IV	Prote	54
	567 2000		54-100-330-1	RESI	STANT
		INC	H • METRIC • FR		
				Fowler EURO-CAL	v
01 - 01	2880		000	54-100-	
	8"/200mr 12"/300m	n ±	0.001"/0.02mm 0.0015"/0.03mm	173.91 223.08	
54-100-330-1 54-100-331-0 54-100-332-0		n ±			\$120. 126. 182.
letini	Caliper	LA V			
igitai	Camper				
		Fowler 54-100-	004-2		
			004-2 Absolute	Readii	ng!
			Absolute	sylvac	ng!
		Fowler 54-100-		Fowler	
		Fowler 54-100-	Absolute	Fowler 54-100-000	
		Fowler 54-100-	Resolution: 0.0005"// Absolute/Incrementa Stainless steel frame Direct Inch/Metric co	Fowler 54-100-000 0.01mm I Measurement onversion	
SPC RS232		Fowler 54-100-	Aboolute Aboolute Aboolute Absolute/Incrementa Stainless steel frame Direct Inch/Metric co Large easy-to-read I Absolute referencing	Fow/er 54-100-000 0.01mm I Measurement onversion .CD display	
	Com San San San San San San San San San San	Fowler 54-100-	Aboolute • Resolution: 0.0005"// • Absolute/Incrementa • Stainless steel frame • Direct Inch/Metric co • Large easy-to-read L	Fowler 54-100-000 0.01mm I Measurement nversion .CD display	-2
	000 000 000 000 000 000 000 000 000 000 000 000	E 000	Aboolute Aboolute Aboolute Absolute/Incrementa Stainless steel frame Direct Inch/Metric co Large easy-to-read I Absolute referencing	Fowler 54-100-000 0.01mm I Measurement nversion .CD display	-2 ale Prid \$101.1
SPC A5232 DIRECT Order No. 54-100-004-2 54-100-000-2 54-100-008-2	0 - 4"/100mm 0 - 6"/150mm 0 - 8"/200mm	Ecwier 54-100- 049 0-045 0-045 0-045 0-045 0-045	Aboolute • Resolution: 0.0005"// • Absolute/Incrementa • Stainless steel frame • Direct Inch/Metric co • Large easy-to-read L • Absolute referencing • Includes case	Fowler 54-100-000 0.01mm I Measurement nversion .CD display	-2 -2 \$101.1 117.5 138.4
SPC RS232 DIRECT Order No. 54-100-004-2 54-100-000-2	0 - 4"/100mm 0 - 6"/150mm	Covier S4-100- S4	Aboolute • Resolution: 0.0005"// • Absolute/Incrementa • Stainless steel frame • Direct Inch/Metric co • Large easy-to-read L • Absolute referencing • Includes case	Fowler 54-100-000 0.01mm I Measurement nversion .CD display	-2 -2 slee Price \$101.1 117.5

6

Prices & Specifications are subject to change without notice.



Order No.	Range	Display Type	List Price	Sale Price
54-101-300-P	Buy a 12" (54-	101-300-1) and Get a 6" (54-101-150-2) FREE	\$169.07	\$112.64
54-101-150-2	6"/150mm	Regular Display - includes FREE NIST Cert.	56.43	46.20
54-101-600-1	6"/150mm	Super Large Display with hold feature	73.59	60.30
54-101-800-1	8"/200mm	Super Large Display with hold feature	110.22	90.20
54-101-300-1	12"/300mm	Regular Display - includes FREE NIST Cert.	112.64	92.20
54-101-900-1	12"/300mm	Super Large Display with hold feature	147.18	120.50

TRA-VALUE *Plus* Electronic Caliper

INCH • METRIC • FRACTION



Find

us on socia

Π

5

S

And chain ist Grade Dial Calipers * Very precise the consistent readings. I would never the consistent readthe consistent readthe consistent readthe consistent readthe consistent

	Order No.	Range	Dial Face Color	Accuracy	Sale Price
	52-008-706-0	0 - 6"	White	± 0.001"	\$83.00
	52-008-707-0	0 - 6"	Black	± 0.001"	83.00
	52-008-708-0	0 - 8"	White	± 0.0015"	80.50
ļ	52-008-712-0	0 - 12"	White	± 0.002"	Compare to Mitutoyo 505-746 @ \$230.00 119.90
	52-008-709-0	0 - 150mm	Yellow	± 0.02mm	83.00

0 - 6" Dial Calipers

hát					
depth and ste		,		52-008-00	
Covered rack Accuracy ± 0. 0.100" per re Dial graduation Hardened state	001" volution			32-000-00	
Order No.	Range	Dial Face Color	Accuracy	List Price	Sale Price
52-008-005-0 52-008-007-0	0 - 6"/150mm 0 - 6"/150mm	Black White	± 0.001" ± 0.001"	\$103.73 96.36	\$78.90 78.90
Dial		lus Dia	ւչգել դգոյ ⁶ ^{en} Stainkes Hardened	ers	Protected to: IP54 COOLANT & FLIID RESISTANT

Prices & Specifications are subject to change without notice.

0.001"

0.001"

\$139.70

139.70

\$110.00

110.00

± 0.001"

± 0.001"

8

52-008-050-0

52-008-051-0

0 - 6" - white dial face

0 - 6" - black dial face

Premium Dial Caliper

- · 4-way measuring, inside, outside, depth and step
- Solid stainless steel construction
- Silky smooth movement throughout
- 0 6" range, 0.100" per revolution, 0.001" graduations
- Thumbroll for rapid setting
- Knurled lock assures precise settings

Order No. 52-008-006-2

iii)

Compare to Mitutoyo 505-742 @ \$109.67



Inch/Metric Reading Dial Calipers



- Dial face reads in both inch (black) and metric (red)
- · Hardened stainless steel throughout
- 4-way measuring, inside, outside, depth and step
- · Raised sliding surface prevents wear and defacement of graduations
- Covered stainless steel rack

Order No.	Range	Graduation	Accuracy	List Price	Sale Price
52-030-008-0	0 - 8"/200mm	0.001"/0.02mm	± 0.0015"	\$138.71	\$110.00
52-030-012-0	0 - 12"/300mm	0.001"/0.02mm	± 0.002"	186.34	150.00

Vernier Calipers

- Made of fully hardened stainless steel; microfine black graduations on a satin chrome finish for easy, precise reading
- All models offer a depth rod which can be read directly from verniers
- Measuring faces are ground and lapped for extreme accuracy
- 4-way measuring, inside, outside, depth and step
- All sliding surfaces are raised to prevent defacement and wear of graduations

					11					
Order No.	Range	Graduation	Depth of Jaws	List Price	Sale Price					
Vernier Caliper	Vernier Caliper with Fine Adjustment									
52-058-016-0	0 - 6"/0 - 150mm	0.001"/0.02mm	1.6"	\$57.53	\$47.10					
Vernier Caliper	Vernier Caliper with Thumb Lock									
52-059-016-0	0 - 6"/0 - 150mm	0.001"/0.02mm	1.6"	51.92	42.00					

Prices & Specifications are subject to change without notice.

Find us on social I

S

52-058-016-0

52-059-016-0

52-008-024-0

24"

Extended Range Dial Calipers

	• Jaw • Stain • Satin • Dept	uations: 0.001" depth: 3.375" less steel construct chrome finish h rod " internal measurin		52-008-01 Sot-A-THOM BEST SELLERI TOMER HIGH THE	8-0
Order No.	Range	Accuracy	Jaw Depth	List Price	Sale Price
52-008-018-0	18"	± 0.003"	3.125"	\$291.39	\$238.50

3.375"

353.10

\$107.20

\$96.00

288.90

XTRA-RANGE[®] Electronic Calipers

± 0.003'

54-100-312-0	Protected t
Resolution: 0.0005"/0.01mm	IP5 4
Hold feature	COOLANT & FLU RESISTAN
 Absolute/Incremental measurement Preset mode includes offset size for ID measurements	DAV
All sizes feature fine adjustment screw Includes shop hardened case	2 00

Order No.	Range	Accuracy	Jaw Depth	S	ale Price
54-100-312-0	12"/300mm	± 0.002"	3.5"		\$183.10
54-100-024-1	24"/600mm	± 0.003"	4"	Compare to Mitutoyo 550-225-10 @ \$1,035.00	303.10
54-100-042-1	40"/1000mm	± 0.004"	4.9"		902.50

Light Line Electronic Calipers

6" replacement jaws

		54-11	2-012-0	Made in GERMANY
	matic guide wa • Stainless steel • Jaws are adjus • Spare jaws car applications • Both jaws are n • Electronics feat • 0.0005"/.01mm	am made of oxide coated a ys for optimal guidance and jaws, hardened and finely g table and exchangeable be modified and exchange noveable to any position on ure on/off, floating zero and resolution and repeatability d case, instructions and test	I sliding character round with knife e d with standard ja the main beam d direct in/mm con	istics edge top jaws ws for special
Order No.	Range	Accuracy	List Price	Sale Price
54-112-012-0	0 - 12"/300mm	0.0015"/0.04mm	\$316.20	\$265.00
54-112-030-0 Accessory	0 - 31"/800mm	0.002"/0.06mm	728.90	615.00

10

52-075-150-0

Fowler-Sylvac Ultralight IV Electronic Calipers

The Fowler-Sylvac Ultralight IV, new design, new features, built-in Bluetooth transmitter. Discover our amazing Ultralight long range calipers.





Alternative jaws available, contact the Fowler Technical Department for more information 1-800-788-2353


Specifications	54-110-512-0	54-110-524-0	54-110-540-0	54-110-560-0	54-110-580-0	54-110-600-0
Measuring Range	0-15"/0-400mm	0-24"/0-600mm	0-40"/0-1000mm	0-60"/0-1500mm	0-80"/0-2000mm	0-100"/0-2500mm
Maximum Error	30µm/0.0012"	40µm/0.0016"	50µm/0.002"	90µm/0.0035"	120µm/0.0048"	200µm/0.0078"
Repeatability			20µm/0.0008"		30µm/0.001	2"
Measuring Force			5 - 10	N		
Connection			Blueto	oth Smart/Proxi R	5-232 or - USB	
Protection Rating			IP67 (E	Electronic Module)		
Preset Max.			±9999.	99 mm / ±399.9995	IN	
Weight	1.5 kg	1.6 kg	1.9 kg	2.3 kg	2.6 kg	2.9 kg
6	AZ.	-				
Order No.		Range			List Price	
54-110-512-0		0 - 15"/0 - 4			\$2123.70	\$1850.0
54-110-512-0 54-110-524-0						\$1850.00
54-110-512-0		0 - 15"/0 - 4	600mm		\$2123.70	\$1850.0 2095.0
54-110-512-0 54-110-524-0		0 - 15"/0 - 4 0 - 24"/0 - 6	00mm 000mm		\$2123.70 2478.90	\$1850.00 2095.00 2560.00
54-110-512-0 54-110-524-0 54-110-540-0		0 - 15"/0 - 4 0 - 24"/0 - 6 0 - 40"/0- 1 0 - 60"/0 - 1	00mm 000mm	l order	\$2123.70 2478.90 2853.00	\$1850.00 2095.00 2560.00 3850.00
54-110-512-0 54-110-524-0 54-110-540-0 54-110-560-0		0 - 15"/0 - 4 0 - 24"/0 - 6 0 - 40"/0- 11 0 - 60"/0 - 1 0 - 80"/0 - 2	600mm 000mm 500mm		\$2123.70 2478.90 2853.00 4289.40	\$1850.00 2095.00 2560.00 3850.00 5200.00
54-110-512-0 54-110-524-0 54-110-540-0 54-110-560-0 54-110-580-0 54-110-600-0	Cables/Accesso	0 - 15"/0 - 4 0 - 24"/0 - 6 0 - 40"/0 - 10 0 - 60"/0 - 1 0 - 80"/0 - 2 0 - 100"/0 -	500mm 500mm 500mm 2000mm - <i>specia</i>		\$2123.70 2478.90 2853.00 4289.40 5909.80	\$1850.00 2095.00 2560.00 3850.00 5200.00
54-110-512-0 54-110-524-0 54-110-540-0 54-110-560-0 54-110-580-0 54-110-600-0	ables/Accesso	0 - 15"/0 - 4 0 - 24"/0 - 6 0 - 40"/0 - 10 0 - 60"/0 - 1 0 - 80"/0 - 2 0 - 100"/0 -	500mm 500mm 500mm 2000mm - <i>specia</i> 2500mm - <i>speci</i>		\$2123.70 2478.90 2853.00 4289.40 5909.80	\$1850.00 2095.00 2560.00 3850.00 5200.00 6784.00
54-110-512-0 54-110-524-0 54-110-540-0 54-110-560-0 54-110-580-0 54-110-600-0 Connectivity C	ables/Accesso	0 - 15"/0 - 4 0 - 24"/0 - 6 0 - 40"/0- 10 0 - 60"/0 - 1 0 - 80"/0 - 2 0 - 100"/0 -	000mm 000mm 500mm 2000mm - <i>specia</i> 2500mm - <i>speci</i> SB Cable		\$2123.7(2478.9(2853.0(4289.4(5909.8(7141.3() \$1850.00) 2095.00) 2560.00) 3850.00) 5200.00) 6784.00) \$135.00

Prices & Specifications are subject to change without notice.

us on socia П

5

Ĩ

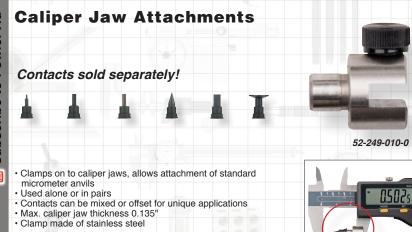

Caliper shown not included


Order No.	Description	List Price	Sale Price
52-249-010-0	Caliper Jaw Attachment	\$42.90	\$38.60
52-249-001-0	Spline: 0.100" dia.	20.40	16.00
52-249-002-0	Knife: 0.188" x 0.031" tip, 30° taper	20.40	16.00
52-249-003-0	Super Spline: 0.050" dia.	20.40	16.00
52-249-004-0	Blade: 0.188" x 0.031"	20.40	16.00
52-249-005-0	Point: 0.020" tip, 30° taper	20.40	16.00
52-249-006-0	Disc: 0.500" dia.	24.20	18.00
52-249-007-0	Complete 7 piece Contact Set, includes 1 Ball Contact	71.40	55.00

Caliper and Height Gage Checker

Fowler's Setting Masters are quick, easy and extremely accurate. Each comes with a manufacturer's certificate of calibration and a wood case. Save time and money by calibrating your own measuring tools.

- Horizontal and vertical use
- · Used for the calibration of height gages and calipers
- Scale on one side reads: 0.5", 2", 4", 6", 8", 10" and 12" for inside caliper measurements
- Scale on side reads: 1", 2", 4", 6", 8", 10" and 12" for height gage and caliper checking
- Accuracy: ± .0002"

NOW available in 24" model - special order



53-813-010-0

	Order No.	Description	List Price	Sale Price
	53-813-010-0	12" Caliper and Height Gage Checker	\$1613.60	\$1400.00
-	53-813-024-0	NEW 24" Caliper and Height Gage Checker	2121.00	1850.00





Contact the Fowler Sales Department 1-800-788-2353

NEW Bluetooth Ranges NOW Available!

Ø

Position recall

- · Delrin guick displacement thimble
- · Adjustable measuring force, 5N/10N (54-815-030-0 only)
- · Menu customizable with free software

ŝ 4IP67

- · Non-rotating spindle with 10mm spindle travel per thimble rotation
- · USB output or bluetooth available







44 I have been in the machining business for over 30 years this is by far the best mic I have ever had. One little thing or should I rephrase that, one huge thing, this mic comes with a lifetime warranty.... no other company can provide that!

John T.

	A 10 14			
Order No.	Description	Max Error		Sale Price
54-815-030-0	0 - 1.18"/0 - 30mm	0.00012"/0.003mm	Compare to Mitutoyo 293-676-20 @ \$560.00	\$486.90
54-815-030-C	1.18"/30mm with ISO/A2L	A Certification		511.90
54-815-060-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm		720.50
54-815-100-0	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm		1007.60
Set				
54-815-111-0	0 - 4"/0 - 102mm			2197.00
Bluetooth Mod	el			
54-815-130-0	0 - 1.18"/0 - 30mm	0.00012"/0.003mm		720.50
54-815-160-0	1.18" - 2.6"/30 - 66mm	0.00016"/0.004mm		953.40
54-815-110-0	2.6" - 4.0"/66 - 102mm	0.00020"/0.005mm		1240.90
Bluetooth Set				
54-815-112-0	0 - 4"/0 - 102mm			2724.70
Connectivity C	ables/Accessory			
54-115-526-0	Proximity cable with USB c	onnection		135.00
54-115-527-0	Proximity cable with serial of	connection		135.00
54-115-246-BT	USB Bluetooth receiver			45.80

Prices & Specifications are subject to change without notice.

us on socia П

5

Į



Electronic Coolant Resistant Micrometers



Order No.	Range	Accuracy	S	ale Price
54-860-001-1	0 - 1"/0 - 25mm	± 0.00016"/0.004mm	Compare to INSIZE 3101-25E @ \$135.50	\$114.30
54-860-002-1	1 - 2"/25 - 50mm	± 0.00016"/0.004mm		117.60
54-860-003-1	2 - 3"/50 - 75mm	± 0.0002"/0.005mm		128.30
54-860-004-1	3 - 4"/75 - 100mm	± 0.0002"/0.005mm		148.90
54-860-005-1	4 - 5"100 - 125mm	± 0.00024"/0.006mm		167.00
54-860-006-1	5 - 6"/125 - 150mm	± 0.00024"/0.006mm		187.00
Set				
54-860-103-1	0 - 3"/0 - 75mm Set			\$334.10

TRA-VALUE II Electronic Micrometers

	S In	62 (165) FFSET ABSin/mm	-870-001-0	
G	Fowler 0-1" 0.00005"		esolution: 0.0000 arbide measuring osolute and incre atchet thimble izes over 1"/25m alibration standar	g faces mental modes m include a
	Ball Attach			
Order No.	Range	Accuracy	List Price	Sale Price
54-870-001-0	0 - 1"/0 - 25mm	± 0.00016"/0.004mm	\$110.20	\$80.20
54-870-002-0	1 - 2"/25 - 50mm	± 0.00016"/0.004mm	119.02	86.60
54-870-003-0	2 - 3"/50 - 75mm	± 0.0002"/0.005mm	134.86	98.10
54-870-004-0 Set	3 - 4"/75 - 100mm	± 0.0002"/0.005mm	150.81	109.70

Wer TOOL-A-THON[®] 2020

Find us on social media

Prices & Specifications are subject to change without notice.

54-870-103-0

0 - 3"/0 - 75mm

\$236.20

\$295.20





54-860-113-1	0 - 1"/0 - 25mm	0.00016"/0.004mm	\$141.57	\$105.00
54-860-114-1	1 - 2"/25 - 50mm	0.00016"/0.004mm	165.77	124.00
54-860-115-1	2 - 3"/50 - 75mm	0.0002"/0.005mm	190.41	142.00
54-860-116-1	3 - 4"/75 - 100mm	0.0002"/0.005mm	214.50	160.00

Electronic IP54 Ball Anvil & Spindle Micrometers



0.0002"/0.005mm

229.90

171.00

54-860-214-1

3 - 4"/75 - 100mm

Point Anvil & Spindle Micrometers



Order No.	Range	Resolution	Accuracy	List Price	Sale Price
54-860-661-0	0 - 1"/0 - 25mm	0.00005"/0.001mm	0.00016"/0.004mm	\$205.26	\$150.00
54-860-662-0	1 - 2"/25 - 50mm	0.00005"/0.001mm	0.00016"/0.004mm	224.51	165.00
54-860-663-0	2 - 3"/50 - 75mm	0.00005"/0.001mm	0.0002"/0.005mm	251.13	185.00
54-860-664-0	3 - 4"/75 - 100mm	0.00005"/0.001mm	0.0002"/0.005mm	273.13	200.00

0.8"/20mm Point Spindle & Blade Anvil Micrometer



 Absolute & incremental modes Order No. 54-860-671-0



Prices & Specifications are subject to change without notice.

17

Find

-

media



	Order No.	Range	Thread Range	Accuracy Sa	ale Price
	52-219-001-1	0 - 1"	64 - 5 TPI/0.4 - 5mm	0.00016" Compare to Mitutoyo 126-137 @ \$412.94	\$81.00
	52-219-002-1	1 - 2"	44 - 3.5 TPI/0.6 - 7mm	0.00016"	89.00
1	52-219-003-1	2 - 3"	24 - 3.5 TPI/1 - 7mm	0.0002"	99.40
	52-219-004-1	3 - 4"	24 - 3.5 TPI/1 - 7mm	0.0002"	108.90

Electronic IP65 Thread Micrometers

•		
		54-219-001-0
		Water Resistant to IP65 specifications
	Protected to:	True inch/metric conversion 60° measuring anvils ABS/INC measuring mode Positive spindle lock
	IP6 5	Painted enamel and heat insulated frame Resolution: 0.00005"/0.001mm
	COOLANT & FLUID RESISTANT	Friction thimble

+	Order No.	Range	Thread Range	Accuracy	List Price	Sale Price
	54-219-001-0	0 - 1"	64 - 5 TPI/0.4 - 5mm	± 0.00008"/0.002mm	\$248.60	\$216.00
1	54-219-002-0	1 - 2"	44 - 3.5 TPI/0.6 - 7mm	± 0.00008"/0.002mm	265.87	224.10
P.	54-219-003-0	2 - 3"	24 - 3.5 TPI/1 - 7mm	± 0.00008"/0.002mm	283.25	238.50
	54-219-004-0	3 - 4"	24 - 3.5 TPI/1 - 7mm	± 0.00012"/0.003mm	300.63	256.50

Deep Throat Electronic Micrometer

- · Range: 0 1"/0 25mm
- Resolution: 0.00005"/0.001mm
- Flat anvil
- Accuracy: ± 0.00012"/0.003mm
- Throat depth: 6"
- ABS/INC modes
- Ratchet thimble and spindle lock
- The spindle thread is hardened, ground and lapped. The anvil and spindle are hardened and precision ground with microlap finish on carbide tipped measuring faces.
- Diameter of measuring faces = 0.256"
- Flatness: 0.00003"
- Parallelism: 0.00005"



Order No. 54-517-001-0

Fowler 0.00005



Deep Throat Vernier Micrometers

Fowler's "U"-frame Deep Throat Micrometers are available with depths of 6" and 12". Use Deep Throat Micrometers for taking accurate measurements of steel and plastic sheets and plates whenever a depth measurement of 2" to 12" is needed.

 Hammertone blue baked enamel frame · Graduations are microfine on satin chrome finish for easy reading 52-517-611-1 · All models feature a ratchet stop thimble for exact and repetitive readings · The spindle thread is hardened, ground and lapped. The anvil and spindle are hardened and precision ground with microlap finish on carbide tipped measuring faces. Diameter of measuring faces = 0.256" · Positive lever locking clamp ensures reliable measurement at all times · Wrench furnished with each micrometer for fast. easy zero adjustment on the sleeve Flatness: 0.00003" Parallelism: 0.00005" 52-517-612-1 supplied with a ball anvil Includes case

Order No.	Range	Graduation	Accuracy	Anvil	Throat Depth	List Price	Sale Price
52-517-611-1	0 - 1"	0.0001"	0.00016"	Flat	6"	\$164.89	\$136.00
52-517-612-1	0 - 1"	0.0001"	0.0002"	Ball	11.875"	205.70	170.00

us on socia Π

5

Ĩ




- · Microfine graduations on satin chrome finish and carbide tipped measuring faces
- Diameter of measuring faces: 0.256"
- Graduation: 0.0001"
- Flatness: 0.00003"
- Positive lever locking clamp
- Spindle thread hardened, ground and lapped for ultimate accuracy
- · Anvil & spindle hardened and precision ground with microlap finish on tips
- · Includes a wrench and case
- · Sizes over 1"/25mm include a calibration standard

Order No.	Range	Accuracy	Thimble	S	ale Price
52-240-001-1	0 - 1"	± 0.00015"	Friction	Compare to Brown & Sharpe 00180070 @ \$118.00	\$38.70
52-240-101-1	0 - 1"	± 0.00015"	Ratchet		38.70
52-240-102-1	1 - 2"	± 0.00015"	Ratchet		45.00
52-240-003-1	2 - 3"	± 0.0002"	Ratchet		52.50
52-240-004-1	3 - 4"	± 0.0002"	Ratchet		58.60
52-240-005-1	4 - 5"	± 0.00025"	Ratchet		64.90
52-240-006-1	5 - 6"	± 0.00025"	Ratchet		71.10
52-240-007-1	6 - 7"	± 0.0003"	Ratchet		77.40
52-240-008-1	7 - 8"	± 0.0003"	Ratchet		91.00
52-240-009-1	8 - 9"	± 0.0003"	Ratchet		103.50
52-240-010-1	9 - 10"	± 0.0003"	Ratchet		117.30
52-240-011-1	10 - 11"	± 0.00035"	Ratchet		129.70
52-240-012-1	11 - 12"	± 0.00035"	Ratchet		142.20
Sets					
52-215-003-1	0 - 3" with	standards and fitte	d shop hardened	case	\$134.60
52-215-004-1	0 - 4" with	standards and fitte	d shop hardened	case	192.80
52-215-006-1	0 - 6" with	standards and fitte	d wooden case		327.30
52-215-012-1	0 - 12" wit	h standards and fitt	ed wooden case		992.10
52-215-612-1	6 - 12" wit	h standards and fitt	ed wooden case		654.50

20

Prices & Specifications are subject to change without notice.

Outside Inch Micrometers

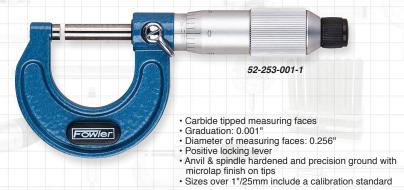

Compare to Brown & Sharpe 599-1-44 @ \$103.00

Sale Price

\$32.50

32.50

38.70

38.70

45.00

52.50

58.60

64.90

Outside Inch Micrometer Set

Accuracy

± 0.001"

± 0.001"

± 0.001"

± 0.001"

± 0.001"

± 0.001"

± 0.001"

± 0.001"

Order No.

52-253-001-1

52-253-101-1

52-253-002-1

52-253-102-1

52-253-003-1

52-253-004-1

52-253-005-1

52-253-006-1

Range

0 - 1"

0 - 1"

1 - 2"

1 - 2"

2 - 3"

3 - 4"

4 - 5"

5 - 6"

Thimble

Friction

Ratchet

Friction

Ratchet

Ratchet

Ratchet

Ratchet

Ratchet



Prices & Specifications are subject to change without notice.

21

Find

us on social

media

Large Capacity Inch Micrometers

Fowler's Large Capacity Inch Micrometers are used for larger applications and is available in sizes up to 20". Each micrometer offers superior design and workmanship to ensure high precision and long life — and at economical prices.



- Hammertone blue baked finish
- · Microfine graduations on satin chrome finish and carbide tipped measuring faces
- Diameter of measuring faces: 0.295"
- · Ratchet stop thimble for exact and repetitive readings
- Flatness: 0.00003"
- · Quick, easy zero adjustment on sleeve
- · Positive lever locking clamp ensures reliable measurement setting at all times
- Anvil & spindle hardened and precision ground with microlap finish on tips
- Includes a wrench and case
- All sizes include a calibration standard

Order No.	Range	Graduation	Accuracy	List Price	Sale Price
52-240-013-0	12 - 13" w/standards & case	0.001"	0.00044"	\$397.54	\$340.00
52-240-014-0	13 - 14" w/standards & case	0.001"	0.00044"	444.18	370.00
52-240-015-0	14 - 15" w/standards & case	0.001"	0.00044"	457.05	380.00
52-240-016-0	15 - 16" w/standards & case	0.001"	0.00044"	499.73	416.00
52-240-017-0	16 - 17" w/standards & case	0.001"	0.0005"	513.48	430.00
52-240-018-0	17 - 18" w/standards & case	0.001"	0.0005"	557.59	465.00
52-240-019-0	18 - 19" w/standards & case	0.001"	0.0005"	589.60	490.00
52-240-020-0	19 - 20" w/standards & case	0.001"	0.0005"	705.32	580.00



Order No.	Range	Accuracy	List Price	Sale Price
52-245-501-0	0 - 1"	0.00016"	\$396.11	\$340.00
52-245-502-0	1 - 2"	0.00016"	459.36	390.00

Digit Counter Micrometers



- Positive locking nut on spindle
- Sizes over 1"/25mm include a calibration standard
- · Includes case

	Order No.	Range	S	ale Price
1	52-224-001-0	0 - 1"	Compare to Mitutoyo 193-211 @ \$144.00	\$105.50
	52-224-002-0	1 - 2"		98.50
	52-224-003-0	2 - 3"		112.20
	52-224-004-0	3 - 4"		123.50
	Sets			
	52-224-103-0	0 - 3" set		\$296.00
	52-224-104-0	0 - 4" set		419.70
	52-224-220-0	0 - 75mm set		311.60

Outside Inch Micrometers

with Decimal Equivalents on Frame



52-235-001-1



- Black decimal equivalents on satin chrome finished forged steel frame
- · Graduations: 0.0001"
- Ratchet thimble and locking nut
- Sizes over 1"/25mm include a calibration standard

Order No.	Range	Accuracy	Thimble	Sale Price	
52-235-001-1	0 - 1"	± 0.0001"	Ratchet	Compare to Starrett T230RL @ \$204.30 \$54.70	
52-235-002-2	1 - 2"	± 0.0001"	Ratchet	63.20	
52-235-003-2	2 - 3"	± 0.0001"	Ratchet	79.10	
Set					
52-235-100-0	0 - 3"			\$190.00	

23

Find us on social I

media



- Ratchet thimble and locking lever
- Microfine graduations
- Sizes over 1"/25mm include a calibration standard 52-229-213-0
- Includes case

Order No.	Range	Accuracy	List Price	Sale Price
52-229-201-0	0 - 1"	± 0.00016"	\$61.05	\$49.00
Sets				
52-229-213-0	0 - 3"	0 - 1", 1 - 2": ± 0.00016"	\$220.11	\$170.00
		2 - 3": ± 0.0002"		
52-229-214-0	0 - 4"	0 - 1", 1 - 2": ± 0.00016"	311.63	235.00
		2 - 3", 3 - 4": ± 0.0002"		

Micrometer Stands





52-247-005-0

- · Unique locking nut adjusts micrometer stand to any position for perfect use and viewing
- · Stand folds for storage

- 52-247-000-0 · Provides a measuring position and
- angle for outside micrometers and other instruments

XTRA MAG 52-247-010-0

- · Holds standard 0-12" micrometers firmly to metal surfaces
- · Use at machine centers, work, assembly and inspection stations, steel tables and shelves
- V-bottom for mounting on cylindrical surfaces
- On/Off magnet switch
- Base is 2.30" L x 1.20" W x 3.50" H



Order No.	Description	List Price	Sale Price
52-247-000-0	Adjustable Micrometer Stand	\$67.10	\$48.80
52-247-005-0	Folding Micrometer Stand	44.99	32.80
52-247-010-0	Magnetic Micrometer Stand	70.00	63.00



- Each set consists of an inside micrometer head and a series of fully hardened and lapped extension
 rods of different lengths all with carbide measuring faces
- · Anvil and spindle are hardened and precision ground with microlap finish on ends
- Microfine graduations on satin chrome
- Positive locking nut on spindle
- Coiled spring pressure contact type rods are each marked with appropriate length
- · Quick, easy zero adjustment on the sleeve
- Accuracy: 0.00005" x (3 + L"/2)
- Graduation: 0.001
- Includes a wrench, case and reference standard
- · It is recommended that the inside micrometer with a rod be calibrated by a micrometer or ring gage

Sale Price	S	Range	Order No.
\$115.30		2 - 6"	52-243-026-1
142.40	Compare to Mitutoyo 139-201 @ \$226.13	2 - 12"	52-243-212-1
184.60		2 - 20"	52-243-220-1
549.00		2 - 40"	52-243-240-1
1638.00		4 - 80"	52-243-480-1

25

Find

l us on social media

Fowler - Sylvac Hi_Cal **Electronic Height Gages** · Extra low measuring force, from 0.2N · Measure internal and external diameters, centerlines, heights, widths, depths and MIN/MAX/TIR capability <u>Hi. Cal 150</u> · Excellent repeatability thanks to the motorized carriage High reliability Data output USB and RS232 · Battery life: 40 hours rechargeable during operation · Touch sensitive probe speed for easy operation · Base with small footprint · Includes: protective cover, charging set, ruby ball probe Ø3mm, setting gage and calibration certificate 0 available with ISO Cert. Fd Contact the Fowler Sales Department \$ 1-800-788-2353 **Accessory Probe Sets** 54-931-150-0 Watch the Demo! Υηι FowlerVid 54-930-215-0 Swiss Quality! owler P RS232 54-930-217-0 1mm Ball Probe with Order No. Range 54-931-150-0 6"/150mm 54-931-150-C

6"/150mm with ISO/A2LA Certification 12"/300mm

12"/300mm with ISO/A2LA Certification

17.5"/450mm 17.5"/450mm with ISO/A2LA Certification

Full Probe Accessory Set Basic Probe Accessory Set

26

54-931-300-0

54-931-300-C

54-931-450-0

54-931-450-C

Accessories 54-930-215-0

54-930-217-0



\$623.80 Value!

54-931-450-0

6"/150mm & 12"/300mm Hi_Cal Purchase

Accuracy	List Price	Sale Price
0.00013"/0.0034mm	\$4898.40	\$4408.60
		4658.60
0.00016"/0.0042mm	5629.20	5066.30
		5416.30
0.00020"/0.005mm	6354.00	5718.60
		6068.60
	\$1350.00	\$1215.00
	750.00	675.00

Find us on social media

Prices & Specifications are subject to change without notice.

27

V-Series Special Pricing!

Fowler - Trimos V3, V4 & V5 **Electronic Height Gages**

The Fowler-Trimos V3, V4 and V5 vertical measuring instruments have been developed for the most difficult workshop environments. Manufactured in their entirety in Switzerland, they guarantee a robust, precise and reliable product in the long run.

- "Black mask" display with user friendly functions
- Electronically adjustable measuring force 0.75/1.5 (N)
- Lithium-ion rechargeable batteries
- All adjustments possible without tools
- · Cast iron base for optimal stability
- RS232 and USB interfaces requires 54-192-112-0 cable
- Dual probe holders (V4 and V5 Only)
- Carriage displacement: Manual
- (V5 includes selectable manual or motorized carriage displacement)
- Measures heights, diameters, perpendicularity, centerlines, Min/Max/Delta
- Resolution: 0.00005"/0.001mm
- Repeatability (2s): 0.00008"/0.002mm (Ø 0.00016"/0.004mm)
- All V Models Include:
- Charging unit
- · Measuring insert with ruby ball Ø4mm
- Probe holder elbow Ø 8mm
- Setting gage

User's manual and test certificate

V3 54-192-340-0 54-192-370-0 Measuring Range 16"/407mm 28"/711mm Range with Probe inverted 20"/508mm 31.9"/812mm 0.00028"/0.007mm Max. Permissible Errors 0.00032"/0.008mm Frontal Squareness Deviation 0.0004"/0.010mm 0.0006"/0.015mm Air Cushion NO

V4	54-191-440-0
Measuring Range	16"/407mm
	28.3"/719mm
Max. Permissible Errors	0.0002"/0.005mm
Frontal Squareness Deviation	0.0004"/0.010mm
Air Cushion	

54-191-470-0 28"/711mm 40.2"/1023mm 0.00028"/0.007mm 0.0006"/0.015mm YES

Free Swiss Knife &

Fowler Hat with Any

V3, V4 & V5 purchase!



A TRIMOS

4				
Ľ.	V5	54-199-540-0	54-199-570-0	
h	Measuring Range	16"/407mm	28"/711mm	Watch the Demo!
U	Range with Probe inverted	28.3"/719mm	40.2"/1023mm	
n	Max. Permissible Errors (µm)	2.5 + L	.(mm)/300	You Tube
L	Frontal Squareness Deviation	0.0002"/0.005mm0.0	00032"/.008mm	
Ľ	Air Cushion	· · · · · · · · · · · · · · · · · · ·	/ES	FowlerVid
L				Fowlervia

OrdenNie	Description	Damas	List Dates	Colo Dalas
Order No.	Description	Range	List Price	Sale Price
54-192-340-0	V3 Height Gage	16"/407mm	\$4588.50	\$4129.70
54-192-370-0	V3 Height Gage	28"/711mm	5059.00	4553.10
54-191-440-0	V4 Height Gage	16"/407mm	6044.10	5439.70
54-191-470-0	V4 Height Gage	28"/711mm	7031.20	6328.10
54-199-540-0	V5 Height Gage	16"/407mm	6661.40	5995.30
54-199-570-0	V5 Height Gage	28"/711mm	7894.00	7104.60
Probe Sets				
54-199-105-0	4mm Probe Set, 21 piece		\$1765.30	\$1588.80
54-199-106-0	8mm Probe Set, 16 piece		1317.30	1200.00
54-199-107-0	Economy Probe Set, 7 piece		467.70	450.00
Accessories				
54-199-400-0	12"/300mm Holder - for 8mm p	probes	\$988.20	\$889.40
54-777-120-0	Vmux software - for connecting	g multiple units to one PC	465.50	395.00





Z-HEIGHT . Electronic Height Gages



- NEW base design with painted enamel finish has a more comfortable grip and is finely ground and lapped for smooth movement on surface plates
- NEW fine adjust feature allows precise adjustment to required settings
- NEW preset feature allows setting pre-determined or reference measurements
- NEW 2 indicator holding bars included (3/8" and 8mm)
- Direct inch/metric conversion
- Resolution 0.0005"/0.01mm
- Floating zero
- Large, high contrast LCD display
- Coarse adjustment hand wheel
- Carriage locking lever
- · Carbide tipped scriber



e	Sale Price	Accuracy	Range	Order No.
0	\$477.00	± 0.0016"/0.04mm	12"/300mm	54-175-012-0
0	556.00	± 0.002"/0.05mm	18"/500mm	54-175-018-0
0	Compare to Mitutoyo 625.80	± 0.002"/0.05mm	24"/600mm	54-175-024-0
	570-314 @ \$954.85			

54-175-024-0

FOOL-A-THON® 2020

Vernier Height Gages

- Adjustable main scale. Quickly "reset" zero or for easy reading without special calculations
- Swing-away magnifier plus extra long vernier scales with wide separations in inch and metric
- · Fine adjustment mechanism
- · Carbide tipped scriber for direct reading over the full range
- · Satin-chrome finish for glare free reading. Raised lands
- prevent friction wear. • Beam & slide of hardened stainless steel. Base and measuring surfaces all hardened tool steel, carefully ground and microlapped.
- Graduations: 0.001"/0.02mm

Order No.	Range	Accuracy	List Price	Sale Price
52-174-012-0	12"/300mm	0.003"/0.08mm	\$350.24	\$175.00
52-174-024-0	24"/600mm	0.004"/0.1mm	801.46	400.00
52-174-040-0	40"/1000mm	0.004"/0.1mm	1821.27	900.00

52-174-012-0



54-567-110-BT

54-567-200-BT

54-567-210-BT

54-115-526-0

54-115-527-0

54-115-246-BT

6 - 8" /150 - 200mm

4 - 8" /100 - 200mm

54-567-620-BT 0.250" - 0.750"/76 - 20mm

Connectivity Cables/Accessory

0.750" - 4"/20 - 100mm

USB bluetooth receiver

Proximity cable with USB connection

Proximity cable with serial connection

Prices & Specifications are subject to change without notice.

2 heads, 1 handle, 1 ring

4 heads, 1 handle, 2 rings

6 heads, 1 handle, 4 rings

5 heads, 1 handle, 3 rings

4943.30

7824.30

6094.40

3456 70

\$143.00

143.00

50.80

4201.90

6650.70

5180.30

2938.20

\$135.00

135.00

45.80



Order NO.	naliye	Includes	LIST PHICE	Sale Price
54-367-000-BT	0.080" - 0.250"/2 - 6mm (2-point heads)	5 heads, 1 handle, 3 rings	\$5762.20	\$4897.90
54-367-010-BT	0.250" - 0.375"/6- 10mm	2 heads, 1 handle, 1 ring	2400.90	2040.80
54-367-020-BT	0.375" - 0.750"/10 - 20mm	3 heads, 1 handle, 2 rings	2865.00	2435.30
54-367-050-BT	0.750" - 2" /20 - 50mm	3 heads, 1 handle, 2 rings	3890.80	3307.20
54-367-100-BT	2 - 4"/50 - 100mm	3 heads, 1 handle, 2 rings	4307.70	3661.60
54-367-105-BT	4 - 6"/100 - 150mm	2 heads, 1 handle, 1 ring	3636.70	3091.20
54-367-110-BT	6 - 8" /150 - 200mm	2 heads, 1 handle, 1 ring	4803.90	4083.40
54-367-200-BT	4 - 8" /100 - 200mm	4 heads, 1 handle, 2 rings	7590.70	6452.10
Connectivity Ca	ables/Accessory			
54-115-526-0	Proximity cable with USB connection		\$143.00	\$135.00
54-115-527-0	Proximity cable with serial connection		143.00	135.00
54-115-246-BT	USB bluetooth receiver		50.80	45.80

Prices & Specifications are subject to change without notice.

Π

5

media

Fowler-Bowers XT-Series Holemikes



anvils.



The Fowler-Bowers range of mechanical two and three point bore micrometers are now available as XT extended travel holemikes, allowing a wide measurement range without the need to interchange

- · 3-pt contact with tungsten carbide measuring anvils above 0.5"
- Blind bore measuring heads featured above 0.5"
- Ratchet stop for consistent measuring
- Extensions available for deep measuring
- Includes UKAS certificates for all Holemikes and setting rings

				Meas.	Ring	List	Sale	
Order No.	Range	Grads.	Accuracy	Depth	Included	Price	Price	
52-255-310-0	0.250" - 0.312"	0.00025"	0.00015"	2.28"	0.312"	\$745.30	\$596.24	
52-255-311-0	0.312" - 0.375"	0.00025"	0.00015"	2.28"	0.312"	690.10	552.08	
52-255-312-0	0.375" - 0.500"	0.00025"	0.00015"	2.28"	0.5"	690.10	552.08	
52-255-313-0	0.500" - 0.625"	0.00025"	0.00015"	2.44"	0.5"	690.10	552.08	ŀ
52-255-314-0	0.625" - 0.750"	0.00025"	0.00015"	2.44"	0.75"	707.70	566.16	
52-255-315-0	0.750" - 1"	0.00025"	0.00015"	2.60"	0.75"	777.20	621.76	
52-255-316-0	1" - 1.375"	0.00025"	0.00015"	2.60"	1.375"	1107.40	885.92	
52-255-317-0	1.375" - 2"	0.00025"	0.00015"	3.15"	1.375"	1133.80	907.04	
52-255-318-0	2" - 2.625"	0.00025"	0.0002"	3.15"	2.625"	1352.50	1082.00	
52-255-319-0	2.625" - 3.250"	0.00025"	0.0002"	3.15"	2.625"	1364.60	1091.68	
52-255-320-0	3.250" - 4"	0.00025"	0.0002"	3.94"	3.25"	1702.40	1361.92	

Fowler-Bowers XT-Series Holemike Sets

Order No.	Range	Includes	List Price	Sale Price
52-255-565-0	0.250" - 0.375"	2 heads, 2 handles, 1 ring	\$1654.90	\$1323.92
52-255-665-0	0.375" - 0.750"	3 heads, 3 handles, 2 rings	1884.50	1507.60
52-255-775-0	0.750" - 2"	3 heads, 3 handles, 2 rings	2961.00	2368.80
52-255-885-0	2" - 4"	3 heads, 3 handles, 2 rings	4014.10	3211.28

Bore Gage Setting Master Kits - Inch & Metric

Fowler's Bore Gage Setting Master Kit is used for accurately setting any bore gage up to 6"/150mm in diameter to an accuracy of 0.0001"/0.003mm

T	Each Set includes: Setting Device (53-646-000-1 - Inch Model) • Base anvil: 3.950" x 1.050"	Economy Gage Block Sets
Î	Adjustable anvil 2.375" x .375" (two each) Internal capacity: 6"/150mm Depth capacity: 1"/25mm Centralizer capacity width: 2.750"	 36 piece Tolerances to .00005" Certificate of Calibration to NIST
	Quick-release holder for fast adjustment Can also be used for external setting, depend- ing on application (external mics, snap gages, caliper gages)	Metric model: • 33 piece • AS-2 grade • Certificate of Calibration to NIST
	You Instructional video available	at youtube.com/FowlerVid
	53-646-0	00-1 Bore gage shown not included

	Includes: Bore gage setting master and gage block set. All in a custom-fitted case!		
Order No.	Description	List Price	Sale Price
53-646-000-1	Inch Bore Gage Setting Master Kit	\$350.79	\$315.00
53-646-010-0	Metric Bore Gage Setting Master Kit	365.53	265.90
53-646-005-0	Bore Gage Setting Master Kit - without Gage Blocks	202.29	170.00




Prices & Specifications are subject to change without notice.

35

Telescoping Gage Sets

Another great tool for easy and accurate measurements. Under spring tension, the plungers of the gage expand from the center to the size of the hole being measured and are then locked in place using the knurled knob. Final hole size is obtained by measuring over the contacts with a micrometer or vernier caliper.

- · Contact points are constructed of hardened tool steel, precision ground.
 - Double action rigid handle with self-centering feature for quick checking of inside measurements Constant spring tension for uniform feel
- 52-470-006-0 covers a measuring range of 5/16" to 6" with measurable depths of 4" to 5"
- 52-470-007-0 covers a measuring range of 5/16" to 6" with measurable depths of 12"

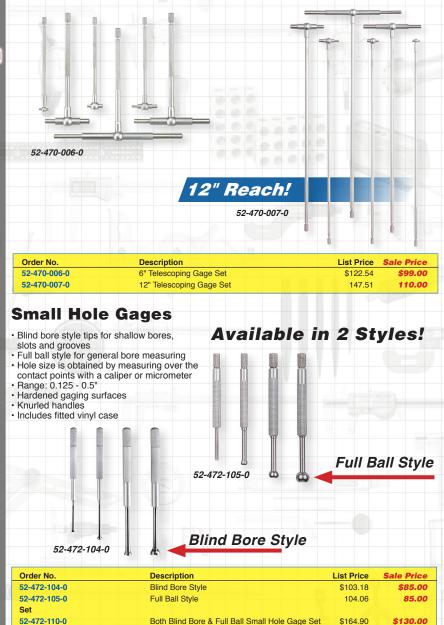



Prices & Specifications are subject to change without notice.



38



Prices & Specifications are subject to change without notice.



Order No. Range Graduation Reading **Balanced Reading Dial Color** Sale Price 52-520-110-1 0 - 100 0.001" 1' Black Compare to Mitutoyo \$75.20 2904S @ \$115.95 52-520-110-2 1' 0.001" 0 - 100 White Compare to Mitutoyo 75.20 2904S @ \$115.95 52-520-105-0 0.50" 0.001" 0 - 100 0 - 50 - 0 White 72.00 1" 0.001" 0 - 50 - 0 52-520-115-0 White 89.90 52-520-125-0 0.250" 0.0005" 0 - 50 0 - 25 - 0 White 99.20 52-520-129-0 0.0005" 0 - 50 0 - 25 - 0White 90.80 1" 52-520-300-0 10mm 0.01mm 0 - 100 0 - 50 - 0 White 85.80 52-520-500-0 25mm 0.01mm 0 - 100 0 - 50 - 0 White 114.40

X-PROOF[®] IP54 Shockproof Dial Indicators



Vina	Ira est	Č E	swiss made	
Multimo	de Electro	nic	10049	
Test Ind	icators	M	ODE SET	
	t is the perfect solu	ution to test		Swiss Quality!
 4 measuring resol Water, oil and coor 1-1/2" diameter di Bar graph and nui Meets or exceeds (Maximum error coord) 	es: Min, Max, TIR and lutions - 0.00005"/0.00 lant resistant to IP65 al face rotates a full 36 meric digital display DIN/ISO Standards n.00005" scale at full ' or extra-long 1-7/16"	1mm or 0.0005"/0.01mm 30° range: 0.0004") 54-562-777	-0	POWIER POWIER POWER INTERNATION
Order No.	Range	Contact Point Length	List Price	Sale Price
54-562-777-0	0.040"/1mm	1/2"	\$358.60	\$330.00
54-562-888-0	0.020"/0.5mm	1-7/16"	388.90	360.00

Test Indicators

Output Cable USB

54-115-528-0

All Fowler Test Indicators include bi-directional constant clockwise rotation, automatic reversal, three dovetail mountings, jeweled movement, two dovetail clamps and a molded case.



	2								
Order	Face	Total	Dial		Dial	Point	List	Sale	
No.	Color	Range	Reading	Graduation	Diameter	Length	Price	Price	
52-562-775-0	white	0.030"	0-15-0	0.0005"	1"	1/2"	\$146.96	\$110.00	
52-562-776-0	white	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	153.67	110.00	
52-562-780-0	black	0.030"	0-15-0	0.0005"	1-1/2"	1/2"	153.67	110.00	



Order No.	Face Color	Total Range	Dial Reading	Graduation	Dial Diameter	Point Length	List Price	Sale Price
52-563-770-0	white	0.008"	0-4-0	0.0001"	1"	1/2"	\$146.96	\$110.00
52-563-772-0	black	0.008"	0-4-0	0.0001"	1-1/2"	1/2"	146.96	110.00


\$242.90

\$218.70

Prices & Specifications are subject to change without notice.

41

Find us on social media

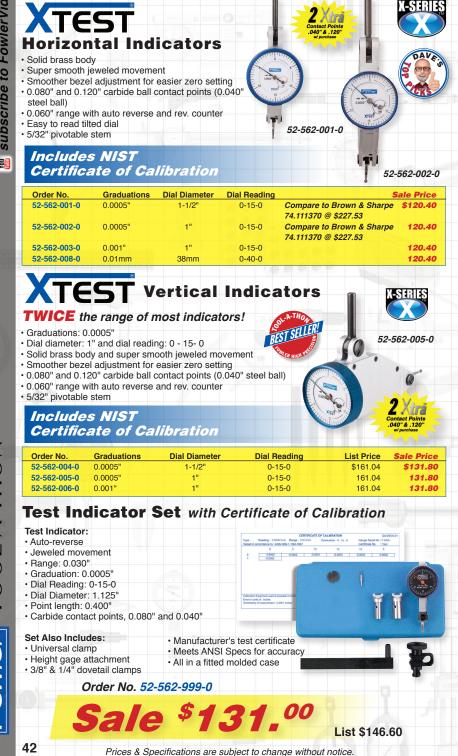

Granite Dial Gage Stand

- Sturdy and compact with extreme stability
- 6" x 6" x 2" granite base
- Positive lock screw
- Fine adjustment knob for zero setting
- Column height is 8"
- Accepts all lug-back indicators
- This stand is maintenance free
- Flatness: 0.00005"

Indicator not included with stand





12" Workshop Transfer X-Stand

The Workshop Transfer Stand is compact in size and lightweight!

Adjusts a variety of ways!

Overall height 12"

- Revolutionary design
- Large range fine adjustment
- Perfect for applications where the stand is moved and/or needs to be transported from location to location
- Hold test indicators or dial gages with dovetail holders & special adaptors
- Large capacity positioning range
- Can be locked in any position
- Base 3" wide x 3.54" long
- · Large handwheel provides fine adjustment
- Stainless steel construction
- Packed in a high quality aluminum case
- Weight 4.8 lbs. (2.2 kg)

Order No. 52-620-717-0

Sale \$110.00

List \$146.96

List \$137.50



43

Find

us on social

Π

5

S



52-125-006-1

Sale Price

\$182.90

150.00

Magnetic Bases

9.5" Height and 85 lb. pull
Base dimensions are 2" x 2·11/32" x 1·13/16"(50mm x 58.7mm x 46mm)
Accepts all AGD dial indicators
V-bottom base allows mounting on cylindrical surfaces
Mounts test indicators with 1/4" post mount
52-585-005-0

	Order No.	Description	List Price	Sale Price
	52-585-005-0	Magnetic base	\$58.74	\$43.00
ſ	52-585-010-0	Magnetic base w/fine adjustment	69.08	50.00

Hydraulic Arm Magnetic Base

- · All purpose magnetic base with 180 lbs. of pulling power
- · Fine adjustment
- · Base can be mounted vertically as well as horizontally,
- · V-bottom base allows mounting on cylindrical surfaces

Adjusts to Virtually Any Position!

Order No. 52-585-095-0



Flex Arm Mag Base

- · Corrosion resistant chrome plated flex arm
- 85 lb pull magnetic base
- · Base can be mounted vertically as well as horizontally
- V-bottom base allows mounting on cylindrical surfaces
- Adjusts to virtually any position

Order No. 52-585-045-0



Prices & Specifications are subject to change without notice.

List \$114.73



Find

us on social

S

American Made Tools!



Back







52-330-012-1

America Rules

- Made in the USA
- Available in 4R. 5R and IN/MM graduations

EZ-Read High Contrast Rules

- Hardened stainless steel · White, microfine graduations against a black background provide a non-glare finish which is extremely easy-to-read
- Satin Chrome Rules Tempered steel
- Non-glare satin chrome finish
- Sharp easy-to-read graduations

IN/MM: 32nds, 64ths, 0.5mm, 1mm Golden Rules

GRADUATIONS 4R: 8ths, 16ths, 32nds, 64ths

 Titanium finish = RC80 for superior wear resistance on flat surfaces

5R: 32nds, 64ths, 10ths, 100ths

 30% harder finish then standard chrome rules

RIGID STEEL RULES

Order No.	Finish	Size	Reading	Sale Price
52-307-006-1	Black	6"	5R	22.80
52-307-012-1	Black	12"	5R	36.40
52-330-006-1	Satin Chrome	6"	4R	22.80
52-330-012-1	Satin Chrome	12"	4R	Compare to Starrett C304SRE-12 @ \$57.99 36.40
52-380-005-1	Satin Chrome	6"	IN/MM	23.70

	FLEXIBLE ST	EEL RULES	4		an 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 199	
	Order No.	Finish	Size	Reading	Sal	le Price
I	52-297-006-1	Black	6"	4R		22.50
1	52-297-012-1	Black	12"	4R		36.40
	52-300-006-2	Satin Chrome	6"	5R	Compare to Starrett C305R-6 @ \$25.89	22.80
	52-300-012-1	Satin Chrome	12"	5R		36.40
1	52-309-006-1	Golden	6"	5R		50.10
	52-309-012-1	Golden	12"	5R		100.00
	52-380-006-1	Satin Chrome	6"	IN/MM		22.80

Screw Pitch Gages

- · Narrow designed blades permit use for internal and external screw threads
- Locking device at each end to secure all blades for storage or position
- Correct pitch is determined by matching blade teeth with threads
- Precisely ground and finished
- · Blades marked with thread size



Order No.	Description	List Price	Sale Price
52-485-051-0	Inch Screw Pitch Gage with 51 blades: 4 to 84 pitch standard V thread	\$55.00	\$44.00
52-485-018-0	Metric Screw Pitch Gage with 18 blades: 0.50 to 7.0mm	22.00	17.60
	center gage with coarse and fine notch included		
52-485-027-0	In/mm Screw Pitch Gage with 28 blades	22.00	17.60
	Inch: 4 to 56 pitch, Metric: 0.50 to 6.00mm		

52-485-051-0

	nic Ed			de	Tool	s!	
ix equally spaces sibility at any a dge finder ligh buches work e epeatability: 0	ced light ports angle its instantly wh dge	provide nen stylus		2	54-5	75-600-0	
BEST SELLER	MADE I US	Ā	-		54-5	575-625-0	
Order No.	Stylus	Shank	Audible	Battery		Sale Price	Ì
54-575-600-0 54-575-625-0	0.200" 0.200"	1/2" 1/2"	NO NO	12 volt 12 volt	\$42.00 145.00	\$37.80 130.50	
easures angle sed to transfe ' arm with knu lade of chrome easures 3-5/1 rovides four w	gular H es from 0-1800 r angles and to rled thumb loce e steel with sat 6" x 2". Rectar orking edges. gle by a lock jo	degrees o set bevels k nut tin finish ngular head Blade securee	MADE US	A STATE	The search	A A A A A A A A A A A A A A A A A A A	
rder No. De	scription			Sale Price			U
2-450-005-0 Pro	ptractor w/semi-c	gular head C	Compare to Sta C19 @ \$97.20 Compare to Sta C183 @ \$87.31	rrett \$45.00 rrett 45.00		50-010-0	
amilo	cking 1		encha	FAST, C,	M.Loc. M	ADE IN	
	ange of Mos 8 to 12mm) ASE CAM!				RCTION! Lea	JSA rn more at Du Tube	
Fits wide rang Patented Rev Quick-action of Taps will neve Heavy-duty de Handles extre	ge of tap sizes: olutionary Can clamping for ea er release durir esign for reliab	n-Lock System asy replaceme ng use pility and long	n ent	Fowler	Fo	eulocime cras	.
Fits wide rang Patented Rev Quick-action c Taps will neve Heavy-duty de Handles extre Can be used a	je of tap sizes: olutionary Can clamping for ea er release durir esign for reliab eme torque	n-Lock System asy replacemeng use bility and long for sizes: 1/16	n ent		Fo		 5

Prices & Specifications are subject to change without notice.

Fowler Digi-Pro Electronic Protractors

The Digi-Pro electronic protractor includes embedded magnets for unique measurement areas. On/Off, Zero, Hold and Reverse feature to invert the display for easier reading in certain situations.

54-440-775-1

	3	
Embedded 25 lb. pu Full, 360° measuring Accuracy: ± 0.2° Repeatability: ± 0.05 Resolution: 0.05° Invertible display fea Voltage: Standard 3'	ture	54-440-740-1
Use the Digi-Pro t accurate angular i	o make fast and measurements!	You Tube FowlerVid
Order No.	Description	List Price Sale Price
54-440-740-1	4" Digi-Pro Electronic Protra	ctor \$102.30 \$83.00

Order No.	Description	List Price	Sale Price
54-440-740-1	4" Digi-Pro Electronic Protractor	\$102.30	\$83.00
54-440-775-1	12" Digi-Pro Electronic Protractor	122.65	99.00
			0

mini-MAG Protractor™

The mini-MAG Protractor provides instant 360° digital inclination display of any angle with the additional unique feature of embedded magnets on both sides and the bottom which make it ideal for a variety of measurements.

- Embedded magnets with 3.5lb. pull
- Uses standard 9V battery (250 hrs.)
- Measuring range: 360° (4 x 90°)
- Display automatically inverts
- Resolution: 0.05°
- Accuracy: ± 0.2°
- Repeatability: 0.05°
- Dimensions: 2.375" x 1.375" x 2.375"
 Hold feature



RHIG

Display inverts for easy reading!

Order No. 54-422-450-1

AV





mini-MAG PLUS

The Mini-Mag **PLUS** Protractor features a USB rechargeable battery, a backlit display, Tilt% function and IP54 protection against water, oil, and fluids.

- · 6 month battery life
- Auto off after 5 minutes
- Embedded magnets
- Measuring range: 360° (4 x 90)
- · Display automatically inverts
- Resolution: 0.05°
- Zero function
 Smaller size: 2.12" x
 2.12" x .9"

Repeatability: 0.05°

Accuracy: ± 0.2°

Hold feature

Sale \$106.00

Order No. 54-422-500-0



List \$129.91

SHOP-BLOX[®] 36 Piece Rectangular Gage Block Set



- Manufactured to meet N.I.S.T. Federal Specification ASME B89. 1.9 - 2002 tolerances on length for inch gage blocks
- · Certificate of Calibration traceable to N.I.S.T.
- Tolerances to ± 0.00005"
- · In high-quality fitted wood case

Order No. 53-672-036-0



1-2-3 & 2-3-4 Blocks

 • 23 holes for easy clamping
 52-439-001-0

 • 52-439-001-0 features one hole only
 • 50 HRC

 • Useful in layout and grinding work
 52-439-001-0

 Order No.
 Description
 Accuracy
 List Price
 Sale P

Order No.	Description	Accuracy	List Price	Sale Price	
52-439-001-0	1-2-3 Blocks w/ 1 hole	± 0.0002"/1"	\$161.81	\$115.00	
52-439-031-0	1-2-3 Blocks w/ 31 holes	± 0.0001"/1"	105.82	77.00	
52-439-234-0	2-3-4 Blocks	± 0.0001"/1"	110.00	92.00	

X-BLOX V-Block Set

- 2 each @:
- Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H
- Work capacity: Approximately 1"
- 2 each @:
- Dimensions: 2" L x 1-1/2" W x 1-1/2" H
- Work capacity: 1-1/2"

All feature:

- Surfaces are square and parallel within 0.0005"
- V-grooves are square and parallel with all surfaces within 0.0005"
- Corresponding dimensions for each pair are alike within 0.0005"

Order No. 52-475-500-0



"You will not go wrong buying this product "

J.B



Prices & Specifications are subject to change without notice.

2 Dimensional Coaxial Indicator Set - Inch

00

List \$318.89

Use the 2D Coaxial Set for accurate component centering and positioning in most machining applications. The dial remains stationary during the rotation of the machine spindle.

- · Indicator assembly with 1.6" (42.5mm) diameter dial
- Graduations and revolution counter 0.0005" (.01mm)
- 3 Internal and 3 External feelers
- Center point feeler

COA

- Restraining arm
- Specifications:
- Length: 6-7/8" (175mm)
- Shank: 3/8" dia. x 7/8" (10mm x 20mm) long
- Feeler ball: 1/8" (3mm) dia.
- Dial readings: 0-50
- Measuring range: 0.250" (6mm) axis offset
- Speed—recommended not to exceed approx. 800 RPM
- · Repeatability to within 0.0002" (0.005mm) of true center
- Capacity depends on feelers installed, but overall range is 5/32-12" (4-300mm) internal diameter; 0-12" (0-300mm) external diameter

X-SERIES

Order No. 52-710-025-0

Compare to Blake COA-850 @ \$399.95



Combination Square

- Blades are chrome plated, fully hardened and tempered
- Includes square, protractor and center head with 12" blade
- Square head has level and scriber point
- Double indexed protractor is graduated
- 180° in both directions
- · Graduated in 8ths, 16ths, 32nds and 64ths





R.L

Order No. 52-370-012-0

3 | e

Compare to Starrett 434-12-4R @ \$297.99



- Used for checking squares, height gages and other instruments
- Hardened and the ends are lapped to 90° angular accuracy
- 6" cylindrical squares: ± 0.0001"
- 12" cylindrical square: ± 0.00015"
- · Includes handles and wood case

Sale

Order No. 52-750-012-0



Prices & Specifications are subject to change without notice.

\$261.00

72.



Carbide	e Super Scri	ber			
			Fow	ler	
			A		
Lightweight	Retractable carbide tip	 Knurled grip 	Machined	aluminum body	Pocket clip
Order No.	Description	Overa	II Length	List Price	Sale Price
52-500-050-0	Carbide Super Scribe	ər	6.5"	\$36.10	\$32.50
52-500-055-0	Carbide Refill			11.10	10.00

Metal Etching Pen

A "must" for any tool room and machine shop for general marking purposes, Fowler's metal etching pen is used on copper, copper alloy, stainless steel, hardened steel tools and castings, etc. Use it to initial personal tools. Its low-cost, disposable design offers limitless applications. Overall length is 6-1/4"

ETCHING MARKER Fowler Tint Order No. 52-730-005-0 Sale \$16.00 List \$22.10 **Super Heavy Duty Automatic Center Punch** Handle constructed in steel. Four knurled bands provide a sturdy grip · Moveable components are made from tool steel and hardened The point is easily removed for sharpening The pressure of marking is controlled by rotating the knurled cap. Screw the cap down for heavy indentations and screw the cap upward for lighter markings. Order No. 52-500-290-0 List \$22.40 TRA-PUNCH **Heavy Duty Transfer Punch Set** • 1/2" - 1" range in 1/64" 36 piece set, 3 master punches and 33 individually sized sleeves · Simply select the laser etched sleeve for the size required, place it on one of the master punches for that range and it is ready to use Punch tips are hardened 48-55 HRC Master punches are 4-7/8" in length and sleeves are 1" in length 1/4" the weight of a conventional transfer punch set





Prices & Specifications are subject to change without notice.

List \$104.72

51

Find

us on socia Π

h,

5

Ĩ

1/32" Premium Parallel Set

- · Made from high-grade alloy steel, hardened and ground from 1/32" stock with 2 holes in each parallel.
- 10 pairs, 6" length, 1/32" width.
- 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8"
- · Height specifications relate to consistency within each pair.
- Absolute heights are nominal.
- Parallelism: ± 0.0001" Paired in height: ± 0.0001"
- Hardness: 50 HRC

Order No. 52-437-031-0

Sale \$216.00 List \$254.10

1/8" Parallel Set

- Made from high-grade alloy steel, hardened and ground from 1/8" stock with 2 holes in each parallel
- 10 pairs, 6" length, 1/8" width
- 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8" Height specifications relate to consistency within each pair. Absolute heights are nominal.
- Parallelism: ± 0.0002"
- Hardness 58 -63 HRC
- Paired in height: ± 0.001"

Order No. 52-437-000-0



Sale \$185.00

1/2" Parallel Set

- · Set of four pairs of parallels are hardened and ground. A must for every shop.
- Sizes: 1", 1-1/4", 1-1/2" and 1-3/4" in height x 6" long with 5/16" holes
- 1-1/2" and 1-3/4" parallels are 1/2" thick
- 1" and 1-1/4" parallels are 3/16" thick
- · Width & height variations: maximum .0004"
- Includes fitted case

Order No. 52-437-001-0



List \$255.09



The X-Pro Portable Roughness Tester II can be used for many applications by selecting from a variety of accessories, including:

- Stand with swivel
- A variety of probes

RS232 is available on certain models (contact the Fowler technical department for more information)

(X-Pro shown with optional stand with swivel)

X-Pro Portable Roughness Tester II

Order No.	Description	Sale Price
54-410-500-0	Portable Surface Roughness Tester 0.0004" probe (NIST specifications)	
	Compare to MAHR EMD-1500-311 @ \$2395.00	\$1666.70
54-410-600-0	Portable Surface Roughness Tester 0.0002" probe (DIN specifications)	
	Compare to MAHR EMD-1500-311 @ \$2395.00	1666.70

X-Pro Portable Roughness Tester II Stand with Swivel

Order No.	Description	
 54-400-896-0	Stand with Swivel Attachment	

X-Pro Portable Roughness Tester II Probes and Accessories

Order No.	Description	Resolution	Sale Price
54-400-319-0	General Purpose Probe	0.0004"	\$720.00
54-400-326-0	General Purpose Probe	0.0002"	720.00
54-420-321-0	Small Bore Probe	0.0004"	778.50
54-420-327-0	Small Bore Probe	0.0002"	778.50
54-420-301-0	Traverse Chisel Probe	0.0004"	778.50
54-420-302-0	Parallel Chisel Probe	0.0004"	778.50
54-420-328-0	Groove Bottom Probe	0.0004"	778.50
54-420-120-0	AC Adapter Kit		61.40

Prices & Specifications are subject to change without notice.

Find

d us on social media!

Sale Price \$441.00

Tool Presetter

Quick checking of heights and diameters (radius) of all kinds of tools such as ISO, BT, HSK, VDIA etc. is guaranteed by a fixed precise steel measuring column with displacement devices in coordinates (X/Z) and constant measuring force.

Tool Holding Spindle

Tool presetter is supplied with high precision imported ball cage bearing (Grade 0) High precision spindle has:

ISO 50 taper

Less than 2 μm concentricity error



Display

- MIN/MAX functions for TIR readings
- 2 reference indications for measurement comparison
- Function for PRESET value and TOLERANCE value inputs
- Tolerance mode indication for upper and lower values
- · Radius or diameter indication on X-axis display
- · Measuring unit (mm/inch) indication
- · Low battery warning indication
- · Display hold to retain readings
- · Output OPTO RS232 for each axis
- · Floating zero function anywhere within axis range
- · Carbide measuring insert for durability
- Accepts measuring probes with 8mm shank for unique applications

Additional Features

- · Counter balanced measuring carriage
- Constant measuring force of horizontal measuring arm ensures high accuracy
- High precision Sylvac measuring system



Height Measurement



Diameter/Radius Measurements



Checking of a Runout

Order No.	Description	List Price	Sale Price
54-188-300-0	Tool Presetter	\$10049.50	\$9350.00
54-121-000-0	ISO 50/45 Tool Pot Adaptor	1131.20	
54-121-005-0	ISO 50/40 Tool Pot Adaptor	772.40	
54-121-010-0	ISO 50/35 Tool Pot Adaptor	1131.20	
54-121-015-0	ISO 50/30 Tool Pot Adaptor	878.70	
54-188-333-0	ISO 50 Setting Gage	568.00	
54-188-335-0	ISO 40 Setting Gage	1136.10	
	54-121-000-0 54-121-005-0 54-121-010-0 54-121-015-0 54-188-333-0	54-188-300-0 Tool Presetter 54-121-000-0 ISO 50/45 Tool Pot Adaptor 54-121-005-0 ISO 50/40 Tool Pot Adaptor 54-121-010-0 ISO 50/35 Tool Pot Adaptor 54-121-015-0 ISO 50/30 Tool Pot Adaptor 54-121-015-0 ISO 50/30 Tool Pot Adaptor 54-188-333-0 ISO 50 Setting Gage	54-188-300-0 Tool Presetter \$10049.50 54-121-000-0 ISO 50/45 Tool Pot Adaptor 1131.20 54-121-005-0 ISO 50/40 Tool Pot Adaptor 772.40 54-121-010-0 ISO 50/35 Tool Pot Adaptor 1131.20 54-121-010-0 ISO 50/35 Tool Pot Adaptor 1131.20 54-121-015-0 ISO 50/30 Tool Pot Adaptor 878.70 54-188-333-0 ISO 50 Setting Gage 568.00

9

Fowler

54

7-CHECK () 5 PLUS+ Display lights when ZERO **Z-Axis Tool Setter** reference is reached Supplied with zero reference setting block · Easy to read super large display · Back light turns on when zero reference is achieved **FOOL-A-THON®** · IP65 protected for fluid and coolant resistance · 4 magnets embedded into base · 2" default setting height Steel contact surface with 0.0002" FOWIEr flatness RESISTAN • Range: 0.12"/3mm • Resolution: 0.00005"/0.001mm IP65 in/mm Repeatability: 0.00015"/0.004mm • Accuracy: 0.0001"/0.003mm Uses 1 3V CR2032 battery · Includes a rugged, aluminum fitted case Order No. 54-188-200-0 Sale \$105.00 2020 List \$124.63 **HIGH** Accuracy Z-Axis Detectors For use in CNC Machines and other applications where high accuracy is reauired! N = 4/ Micro Drill Application 54-188-140-0 High accuracy and repeatability, ± 0.000039"/0.001mm IP67 protection Carbide touch surface (0.196"/5mm) 54-188-140-0 54-188-150-0 · High precision bearing guide system for long life Ø5.00 Interchangeable magnetic base Ø5.00 High visibility LED indicator Movement stroke 0.078"/2mm Trigger force: 54-188-140-0, 1.0N (3.6 oz./100g) us on social 0 2.0 54-188-150-0, 0.5N (1.8 oz./50g) 8 Π 240.0 Operation temperature +5°C to 50°C (40°F to 120°F) Uses 2, 1.5V batteries (SR44 or LR44) Battery life approximately 250 hours (on time) Ø20.00 Ø0.97" 5 Order No. Model Dimensions List Price Sale Price Height: 1.57"/40mm, Dia. 0.78"/20mm 54-188-140-0 Metric \$267.70 \$240.00

Prices & Specifications are subject to change without notice.

Height: 2"/50.8mm, Dia. 0.97"/24.638mm

54-188-150-0

Inch

55

240.00

267.70

S



HIGH PRECISION www.fowlerprecision.com

Headquarters

66 Rowe Street • Newton • Massachusetts 02466 (800) 788-2353 • (617) 332-4137 fax sales@fowlerprecision.com

Distribution Center & Showroom

28010 Industry Drive Valencia, California 91355 (415) 633-5354